



FLIR X6570sc



Thermal Focus®
Sterk in Temperatuur
De Vijf Kuilen 2
2380 Ravels - Belgium
BE 0647.621.884
info@thermalfocus.eu
Tel. +32 14 42.96.50
WWW.THERMALFOCUS.EU

P/N: 79402-0202

Copyright

© 2017, FLIR Systems, Inc.

All rights reserved worldwide. Names and marks appearing herein are either registered trademarks or trademarks of FLIR Systems and/or its subsidiaries. All other trademarks, trade names or company names referenced herein are used for identification only and are the property of their respective owners.

Document identity

Publ. No.: 79402-0202

Release:

Commit: 42033

Language: en-US

Modified: 2017-04-11

Formatted: 2017-06-26

Website

<http://www.flir.com>

Customer support

<http://support.flir.com>

Disclaimer

Specifications subject to change without further notice. Camera models and accessories subject to regional market considerations. License procedures may apply. Products described herein may be subject to US Export Regulations. Please refer to exportquestions@flir.com with any questions.



Detector/image	
Sensor material	MCT
Image size	640 × 512
Pitch	15 µm
Aperture	f/2
Windowing	320 × 256/160 × 128
Arbitrary size windowing (down to)	160 × 1
Arbitrary size windowing (steps)	Horizontal: ≥4, steps of 4 pixels. Vertical: ≥1, steps of 1 pixel
Maximum frame rate (full frame)	234 Hz
Maximum frame rate ¹	<ul style="list-style-type: none">• 233 Hz @ 640 × 512 @ 10 µs/ITR• 871 Hz @ 320 × 256 @ 10 µs/ITR• 2872 Hz @ 160 × 128 @ 10 µs/ITR• 14550 Hz @ 160 × 1 @ 10 µs/ITR
Integration time range	10–20 000 µs
Integration time step	12.5 ns
Integration time mode	ITR
Shutter	No
Digital output	GigE/Camlink base
Cooler type	Closed-cycle (rotary) Stirling cooler
Cooling temperature	80 K
Operability	>99%
Mechanical/environmental	
Dimensions (L × W × H) (without lens)	<ul style="list-style-type: none">• 233 mm × 150 mm × 178 mm (9.17 in. × 5.91 in. × 7.01 in.) (without LCD)• 233 mm × 150 mm × 221 mm (9.17 in. × 5.91 in. × 8.70 in.) (with LCD)
Weight without lens	<ul style="list-style-type: none">• 4.550 kg (10.030 lb.) without LCD• 5.000 kg (11.020 lb.) with LCD
Power supply	24 V DC

1. Some cameras also have a minimum frame rate, unspecified. Contact your FLIR representative for more information.



FLIR X6570sc



P/N: 79402-0202

© 2017, FLIR Systems, Inc.



#79402-0202; r. /42033; en-US

Mechanical/environmental	
Power consumption (cooldown/stab)	48 W/35 W
Operational temperature	–20°C/+50°C (–4°F/122°F)
Shock	Operational 6 ms, 25g, IEC 68-2-29
Vibration	Operational 2g, IEC 68-2-26
Radiometry	
Spectral band	Long-wave infrared
Spectral range	7.7–9.3 µm
Thermal sensitivity/NETD	<25 mK (20 mK typical)
CNUC/Hypercal	Yes
Temperature measurement accuracy	±1°C (1.8°F) or ±1%
Maximum temperature without filter	150°C (302°F)
Filter wheel	4 slots for 1 in. filter up to 2.5 mm thick
Filter holding	Bayonet
Timings and signals	
Optical interface	M80
SYNC IN	TTL, singled ended, BNC >300 ns pulse width
SYNC IN Jitter	12.5 ns
SYNC IN active edge	Falling or rising edge
Analog signals	1 x (0/+10 V), BNC
TRIGGER IN	TTL, singled ended, BNC >300 ns pulse width
Video output	DVI 1080p30
Waveform generator	Sinus/triangle/square TTL 0–5 V. Frequency: 0.001 Hz to 250 kHz
GigE	
GigE Vision	Yes
Genicam	On specific configuration only
Camera link	
Connector type	1 x Mini MDR26
Wi-Fi type	802.11g
Lenses	
Available optics	<ul style="list-style-type: none">• L0306—12 mm f/2• L0324—25 mm f/2• L0302—50 mm f/2• L0201—100 mm f/2• L0113TV—200 mm f/F2• L0215—G1 f/2



X6/X8xxx sc with bayonet mount

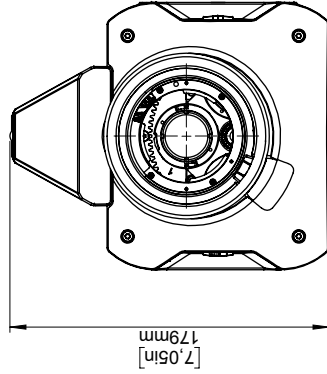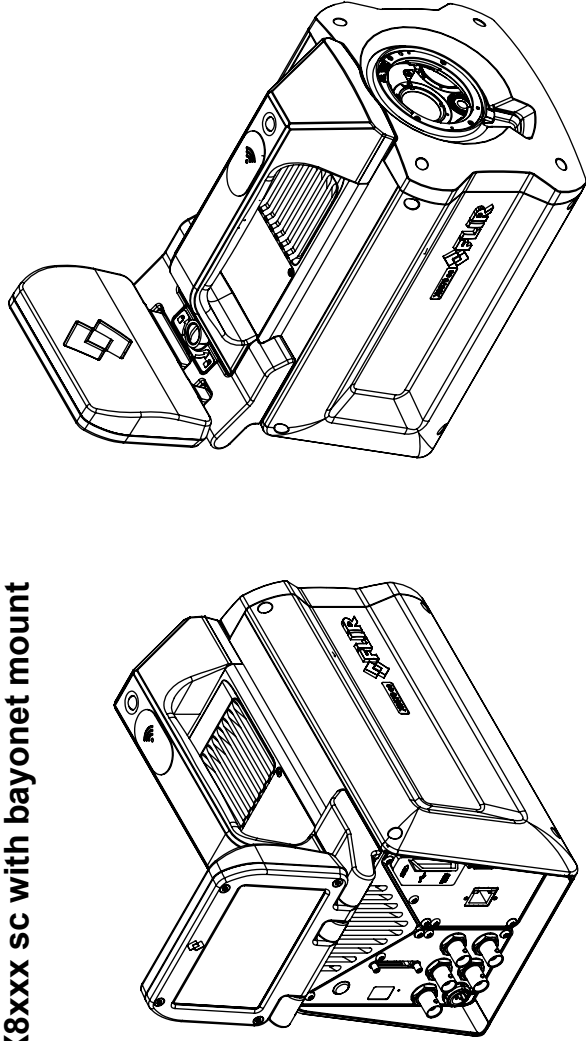

With display removed

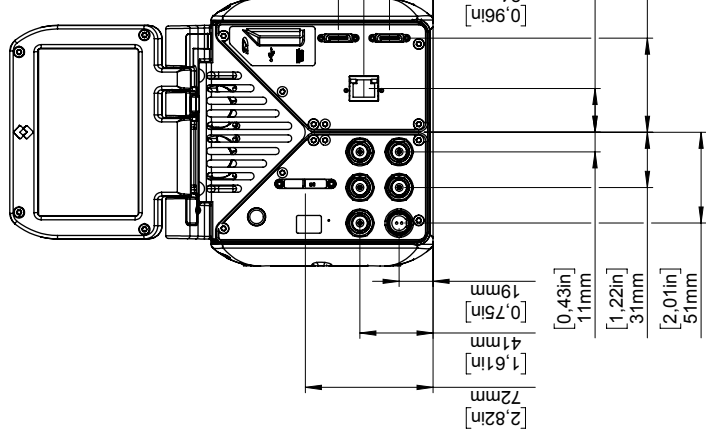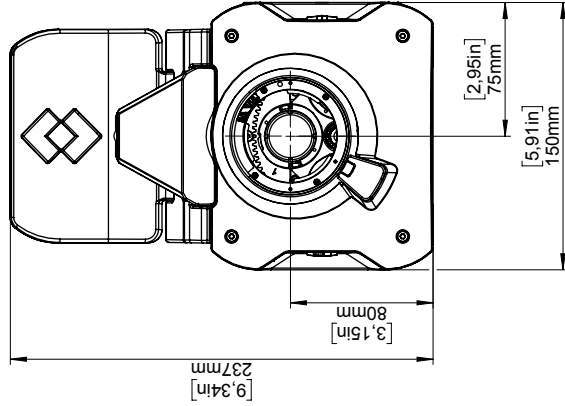


Optical mounting surface




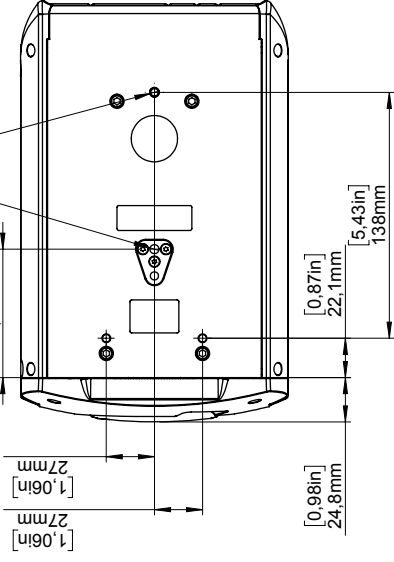
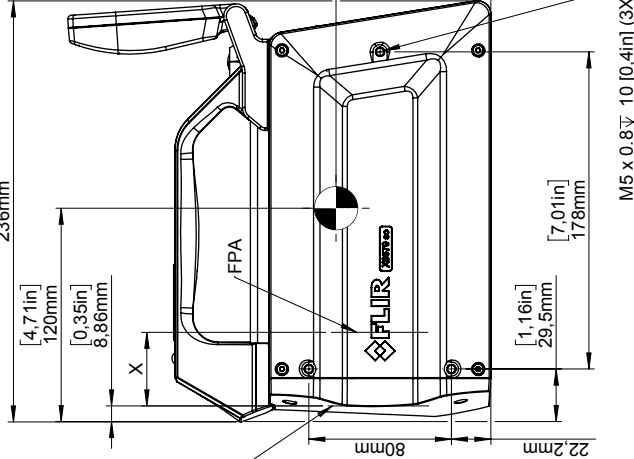


Model name	X	Weight
X6520sc	41.28 mm [1.625 in]	4800 g ± 5 %
X6530sc	41.28 mm [1.625 in]	4800 g ± 5 %
X6540sc	41.28 mm [1.625 in]	4800 g ± 5 %
X6550sc	41.28 mm [1.625 in]	4800 g ± 5 %
X6580sc	41.28 mm [1.625 in]	4800 g ± 5 %
X8400sc	47.90 mm [1.886 in]	5100 g ± 5 %



Modified 2017-02-07	Check FRGU	Drawn by R&D Instruments	Size A3	Sheet 1(2)	Rev A
X6/X8xxx - Basic dimension					
Drawing No. T130229					



X6/X8xxx sc with M80 mount

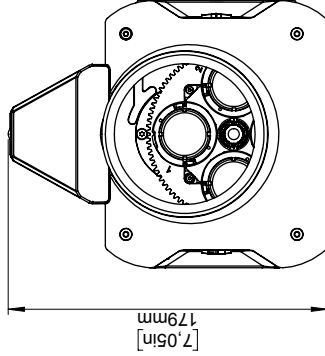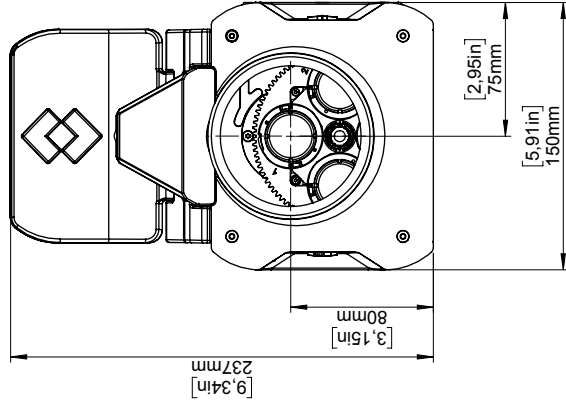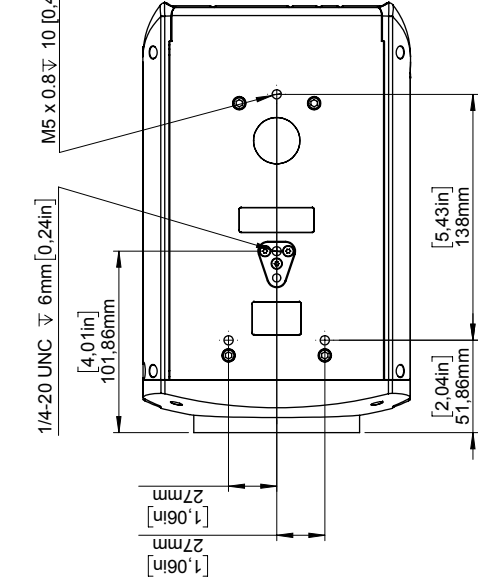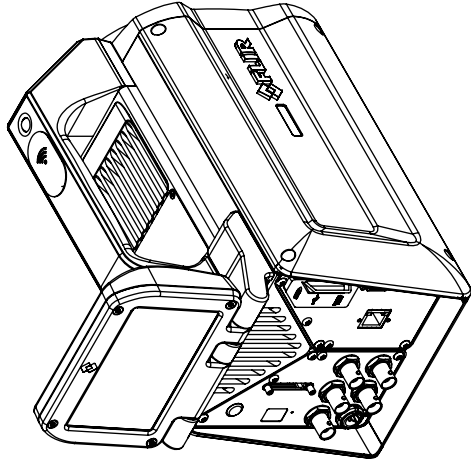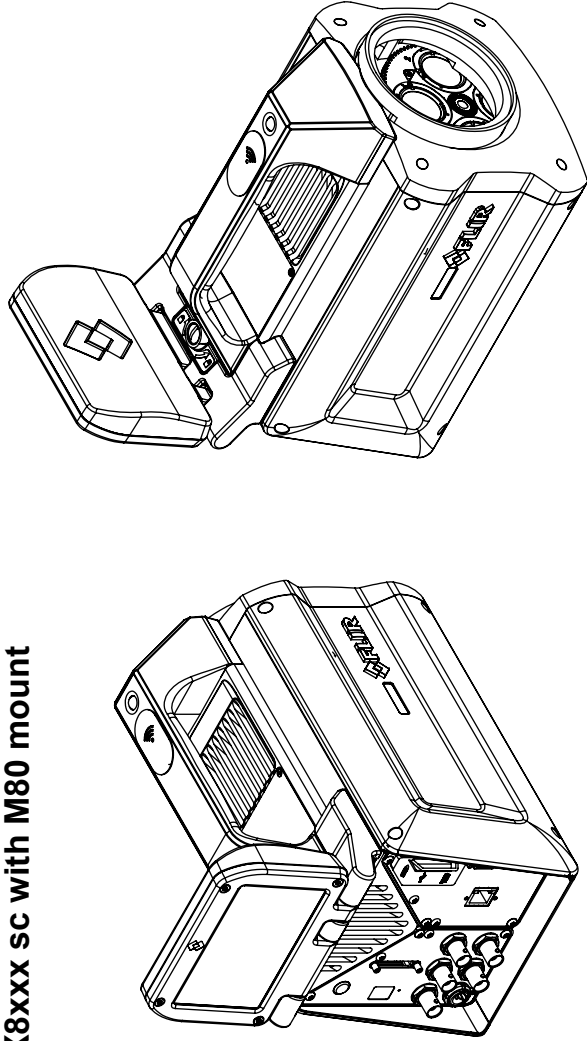

With display removed

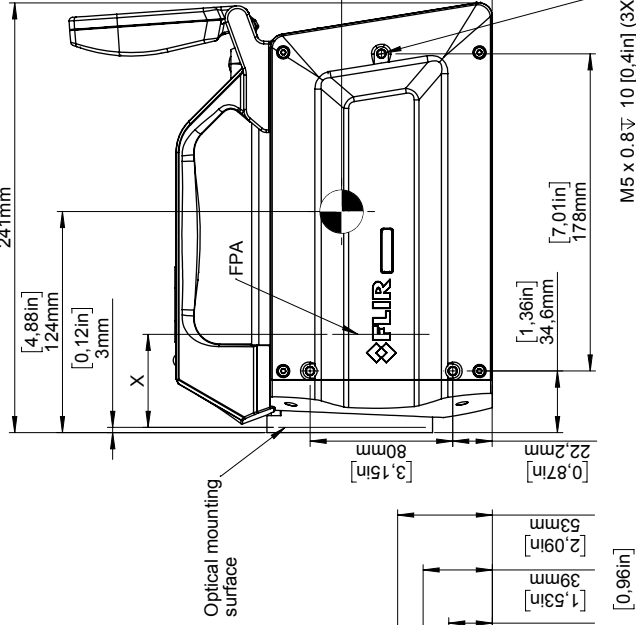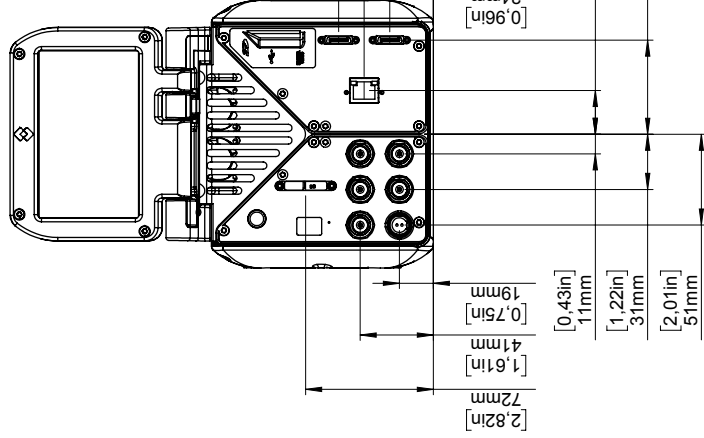

Model name	X	Weight
X6520sc	52.24 mm [2.057 in]	4850 g ± 5 %
X6530sc	52.24 mm [2.057 in]	4850 g ± 5 %
X6540sc	52.24 mm [2.057 in]	4850 g ± 5 %
X6550sc	52.24 mm [2.057 in]	4850 g ± 5 %
X6570sc	52.24 mm [2.057 in]	5000 g ± 5 %
X6580sc	52.24 mm [2.057 in]	4850 g ± 5 %
X8400sc	58.86 mm [2.317 in]	5100 g ± 5 %

Modified
2017-02-07
Check
FRGU
Drawn by
R&D Instruments
Denomination

X6/X8xxx - Basic dimension

Size
A3

Scale
1:3

Drawing No.
T130229

Rev
A

Sheet
2(2)

Rev
A