

FLIR A8200sc

Compact, High Definition, MWIR Performance Camera



The FLIR A8200sc is a compact, high sensitivity MWIR camera that produces low-noise HD thermal images. With its short exposure times and crisply detailed images, the A8200sc is the perfect choice for electronics inspection, aerial thermal mapping, non-destructive material testing, and industrial R&D applications.

High Sensitivity, HD Thermal Images

The A8200sc incorporates a cooled FLIR indium antimonide (InSb) detector that operates in the 3-5 μm waveband. It produces crisp mega pixel thermal images of 1024 x 1024. Achieving a high thermal sensitivity with very low noise (typically <20 mK), the FLIR A8200sc is able to capture the finest image details.

Fast Integration Times

Working in snapshot mode, the FLIR A8200sc is able to capture all pixels from a scene simultaneously. This is particularly important when monitoring fast moving objects which an uncooled thermal camera could not image without blurring. The camera supports faster frame rates when operating in windowing mode.

Standard Video Interfaces


The A8200sc offers true "plug and play" connectivity, with standard GigE Vision® and CoaXpress™ interfaces to transmit full dynamic range digital video, and GenICam for camera control. The HD-SDI video interfaces are simultaneously active yet independently controlled allowing greater flexibility for recording and display purposes.

Advanced Software Compatibility

The FLIR A8200sc camera works seamlessly with FLIR ResearchIR Max or with third-party software such as MathWorks® MATLAB, for intuitive viewing, recording and advanced processing of the infrared data. A Software Developers Kit (SDK) is optionally available.

Key Features


- 1024 x 1024 pixel true HD thermal imagery
- High sensitivity and low noise (<20 mK)
- Small target measurement down to 3.5 μm
- HD-SDI video output
- Wide choice for optics



Integration speeds fast enough to freeze-frame on an F18 at takeoff



Optional temperature calibration up to 3000°C, for research applications such as aerospace



Freezing action such as an engine fuel spray increases temperature measurement accuracy



Thermal Focus®

Sterk in Temperatuur

De Vijf Kuilen 2

2380 Ravels - Belgium

BE 0647.621.884

info@thermalfocus.eu


Tel. +32 14 42.96.50

WWW.THERMALFOCUS.EU

Specifications

System Overview		FLIR A820Qsc
Detector Type	FLIR indium antimonide (InSb)	
Spectral Range	3.0 – 5.0 μm	
Resolution	1024 x 1024	
Detector Pitch	18 μm	
Thermal Sensitivity/NEΔT	<20 mK*	
Well Capacity	2.0 M electrons	
Operability	>99.5% (99.9% typical)	
Sensor Cooling	Closed cycle linear	
Electronics/Imaging		
Readout	Snapshot	
Readout Modes	Asynchronous Integrate While Read; Asynchronous Integrate Then Read	
Synchronization Modes	Sync In, Sync Out	
Minimum Integration Time	480 ns	
Max Frame Rate	50 Hz full frame	
Subwindow Mode	Flexible (steps of 16 columns, 8 rows)	
Dynamic Range	14-bit	
Digital Data Protocol	Gigabit Ethernet (GigE Vision® 2.0) & CoaXPress	
HD Video	HD-SDI (720p/50/59.9, 1080p/25/29.9)	
Camera Control	GenICam, RS-232	
Analog Video	NTSC, PAL	
Command & Control	GenICam	
Measurement		
Standard Temperature Range	-20°C to 350°C (-4°F to 662°F)	
Optional Temperature Range	Up to 1,500°C (2,732°F) Up to 3,000°C (5,432°F)	
Optics		
Camera f/#	f/4.0	
Available Lenses	17 mm, 25 mm, 50 mm, 100 mm, 200 mm	
Close-up Lenses / Microscopes	1x, 4x	
Focus	Manual	
Filtering	Behind-the-lens filter holder	
Image Presentation		
Palettes	Selectable 8-bit	
AGC	Linear, PE, DDE	
Video Zoom	Auto selected; 1x: 1/4 to full window, 2x: <1/4 window	
General		
Operating Temperature Range	-20°C to 50°C (-4°F to 122°F)	
Shock / Vibration	40 g, 11 msec ½ sine pulse / 4.3 g RMS random vibration, all 3 axes	
Power	24 VDC (<50 W steady state)	
Weight w/o Lens	8.2 lbs (3.73 kg)	
Size (L x W x H) w/o Lens	8.9 x 4.6 x 5.3 in (226 x 117 x 135 mm)	
Mounting	2 ea. ¼-20 tapped holes 1 ea. 3/8-16 tapped hole	

* NE Δ T is measured at 50% well-fill, using a 25°C scene

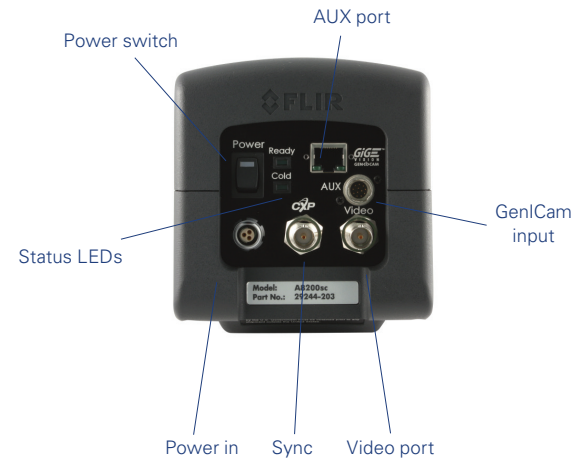

Thermal Focus®
 Sterk in Temperatuur
 De Vijf Kuilen 2
 2380 Ravels - Belgium
 BE 0647.621.884
info@thermalfocus.eu
 Tel. +32 14 42.96.50
WWW.THERMALFOCUS.EU

Specifications are subject to change without notice.
 For the most up-to-date specifications, go to www.flir.com

Equipment described herein may require US Government authorization for export purposes. Diversion contrary to US law is prohibited. Imagery for illustration purposes only. Specifications are subject to change without notice. ©2017 FLIR Systems, Inc. All rights reserved. (Updated Jan 24) 17-0103

www.flir.com/science
 NASDAQ: FLIR